



HP5V SERIES

Swash-plate Type Axial Piston Variable Displacement Pump

HP5V series piston pump is high pressure open circuit axial piston pump specially designed with a new structure, and has lighter weight, higher power density, and longer life compared with HP3V pump.

Apply to open hydraulic circuit

| | | | | | | | |
|-------------------------|-------|-----|-----|-----|-----|-----|-----|
| Displacements (cc/rev): | (S)28 | 28 | 45 | 60 | 76 | 85 | 105 |
| Rated pressure (bar): | 250 | 320 | 320 | 250 | 320 | 280 | 350 |
| Peaking pressure (bar): | 315 | 350 | 350 | 280 | 350 | 320 | 400 |



Contents

| | |
|--------------------------------------|-------|
| Technical Data | 02 |
| Type introduction | 03-05 |
| Regulators introduction | 06-12 |
| Installation size | |
| · HP5VS28 Installation size | 13-14 |
| · HP5V28 Installation size | 15-16 |
| · HP5V45/60 Installation size | 17-18 |
| · HP5V76/85 Installation size | 19-21 |
| · HP5V105 Installation size | 22-23 |
| · Through Drive Installation Options | 24-27 |

Features

- Variable pump in swash-plate design for open circuit.
- High continuous pressure.
- Exceptional self-priming capability.
- Available with American (SAE) and Japanese (JIS) mounting flanges and shafts.
- Excellent reliability and long life.
- High power to weight ratio.
- Variety of control options.
- Optional through drive.
- Quick control response.
- Low pressure pulsation and low noise.
- Developed for engineering, mobile vehicles, industrial, other industrial application and agricultural machinery.

Technical Data

HP5V

| Size | | HP5VS28 | HP5V28 | HP5V45 | HP5V60 | HP5V76 | HP5V85 | HP5V105 |
|---------------------------------------|---|---|--------|--------|--------|--------|--------|---------|
| Displacement (cc/rev) | | 28 | 28 | 45 | 60 | 76 | 85 | 104.3 |
| Pressure | Rated pressure (bar) | 250 | 320 | 320 | 250 | 320 | 280 | 350 |
| | Peak pressure (bar) | 315 | 350 | 350 | 280 | 350 | 320 | 400 |
| Rotation speed | Max for self-priming ¹ (rpm) | 3000 | 3000 | 2700 | 2400 | 2400 | 2400 | 2200 |
| | Max ² (rpm) | 3600 | 3600 | 3250 | 3000 | 3000 | 3000 | 2600 |
| Weight (Kg) | | 17.2 | 20 | 24 | 24 | 28 | 28 | 45 |
| Quantity of oil to fill pump case (L) | | 0.55 | 0.6 | 0.6 | 0.6 | 0.8 | 0.8 | 1 |
| Input torque rating (Nm) | | 198 | 155 | 225 | 225 | 400 | 400 | 530 |
| Temperature Range (°C) | | -20~95 | | | | | | |
| Viscosity Range (mm ² /s) | | 10-1000 ^{*3} (The best use of viscosity range 16~36 mm ² /s) | | | | | | |

Permissible through drive torque

| Input shaft code | S1 | S2 | S3 | S4 | S5 | K1 | K2 | K3 |
|--------------------------|-----|-----|-----|-----|------|-----|-----|-----|
| Input torque rating (Nm) | 171 | 272 | 552 | 925 | 1470 | 145 | 230 | 430 |

1. Steady state suction pressure should be 0 bar and above(at normal condition);
2. If suction pressure less than 0 bar, Boost pressure should be required;
3. In case of 200-1000mm²/s, please allow system to warm up before using machine.

Type introduction

| | | | | | | | | | | | | | | | | | | |
|------|----|---|---|---|---|---|---|----|----|---|---|---|------|---|---|---|---|---|
| HP5V | 76 | / | A | V | 1 | O | R | B2 | S1 | M | S | — | L1/1 | — | D | 2 | — | T |
| ① | ② | | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ | ⑪ | | ⑫ | | ⑬ | ⑭ | | ⑮ |

Product series

| | | |
|---|------------------------|-------|
| ① | Product series | HP5V |
| | Compact product series | HP5VS |

Displacement

| | | | | | | | | |
|---|--------------|--------|----|----|----|----|----|-----|
| ② | Displacement | cc/rev | 28 | 45 | 60 | 76 | 85 | 105 |
|---|--------------|--------|----|----|----|----|----|-----|

Design series

| | | | |
|---|---------------|----------|---|
| ③ | Design series | A Series | A |
|---|---------------|----------|---|

Seals

| | | | |
|---|-------|------------------------------------|---|
| ④ | Seals | FKM (Viton rubber: DIN ISO 1629) | V |
| | | NBR (Nitrile rubber: DIN ISO 1629) | N |

Hydraulic circuit

| | | | |
|---|-------------------|--------------|---|
| ⑤ | Hydraulic circuit | Open circuit | 1 |
|---|-------------------|--------------|---|

Through Drive

| | | S28 | 28 | 45 | 60 | 76 | 85 | 105 | Code | |
|-------------|--|---------------------------|----|----|----|----|----|-----|------|----|
| ⑥ | Without through drive | ● | ● | ● | ● | ● | ● | ● | O | |
| | Without through drive, SAE flange ports, rear | ● | ○ | ● | | | | | NO1 | |
| | Without through drive, Thread ports, rear | | | ● | | | | | NO2 | |
| | Standard configuration with gear pump 6cc/rev | | | ● | ● | ● | ● | ○ | X1 | |
| | Standard configuration with gear pump 10cc/rev | | | ○ | ○ | ○ | ○ | ○ | X2 | |
| | Mounting Flange | Spline shaft | | | | | | | | |
| | SAE A 82-2 | SAE J744-16-4 9T 16/32DP | | ● | ● | ● | ● | ● | ● | A1 |
| | | SAE J744-19-4 11T 16/32DP | | | ○ | ○ | ● | ● | ● | A2 |
| | SAE B 101-2 | SAE J744-22-4 13T 16/32DP | ○ | ● | ● | ● | ● | ● | ● | B1 |
| | | SAE J744-25-4 15T 16/32DP | | | ● | ● | ● | ● | ● | B2 |
| | SAE C 127-2 | SAE J744-32-4 14T 12/24DP | | | | | ● | ● | ○ | C1 |
| | | SAE J744-38-4 17T 12/24DP | | | | | | | ○ | C2 |
| SAE C 127-4 | SAE J744-32-4 14T 12/24DP | | | | | ● | ● | ● | C3 | |
| | SAE J744-38-4 17T 12/24DP | | | | | | | ● | C4 | |

Type introduction

Direction of Rotation

| | | | |
|---|-----------------------|-------------------|---|
| ⑦ | Viewed on drive shaft | Clockwise | R |
| | | Counter-clockwise | L |

Input Mounting flanges

| ⑧ | Mounting flanges size | S28 | 28 | 45 | 60 | 76 | 85 | 105 | Code |
|-------------|-----------------------|-----|----|----|----|----|----|-----|------|
| | SAE B 101-2 | ● | ● | ● | ● | | | | |
| SAE C 127-2 | | | | | | ● | ● | ● | C2 |
| SAE C 127-4 | | | | | | ● | ● | ● | C4 |

Input Shaft

| ⑨ | Shaft size | S28 | 28 | 45 | 60 | 76 | 85 | 105 | Code |
|--|---------------------------|-----|----|----|----|----|----|-----|------|
| | SAE J744-22-4 13T 16/32DP | ● | ● | ● | ● | ○ | ○ | | |
| SAE J744-25-4 15T 16/32DP | | | ● | ● | ● | ● | | | S2 |
| SAE J744-32-4 14T 12/24DP | | | | | | ● | ● | ● | S3 |
| SAE J744-38-4 17T 12/24DP | | | | | | | | ● | S4 |
| SAE J744-44-4 13T 8/16DP | | | | | | | | ● | S5 |
| SAE J744-22-1 B6.35×28 straight shaft | ● | ● | | | | | | | K1 |
| SAE J744-25-1 B6.35×32 straight shaft | | | ● | ● | | | | | K2 |
| SAE J744-32-1 B7.94×44 straight shaft | | | | | | ● | ● | | K3 |
| ISO straight shaft (non through shaft) | | ● | ● | ● | ● | ● | ● | ● | P |

Thread type of Flange Fixing Port

| | | | |
|---|-------------|----------------|---|
| ⑩ | Thread type | Metric threads | M |
| | | UNC threads | S |

Connection type (except inlet and outlet port)

| | | |
|---|-------------------------|---|
| ⑪ | UNC port, ISO 11926 | A |
| | BSPPG thread, JIS B2351 | G |
| | Metric port, ISO 9974 | M |

Type introduction

Control type

| Control type | | S28 | 28 | 45 | 60 | 76 | 85 | 105 | Code | |
|--------------|-------------------------------------|---|----|----|----|----|----|-----|------|---------|
| ⑫ | Apply to constant displacement pump | ○ | ○ | ○ | ○ | ○ | ○ | ○ | N | |
| | Pressure cut-off | Only pressure control | ● | ● | ● | ● | ● | ● | ○ | DR |
| | | Electro-hydraulic pressure control, positive control | ○ | ○ | ○ | | | | | ER1 |
| | | Electro-hydraulic pressure control, negative control | ● | ● | ● | ● | ● | ● | ● | ER2 |
| | | +Load sensing | ● | ● | ● | ● | ● | ● | ○ | L1 |
| | | Remotely operated | ● | ● | ● | ● | ● | ● | ○ | P0 |
| | Power Control | Pressure cut-off+ Load sensing | ● | | ● | ● | ● | ● | ● | L1/1 |
| | | Remotely operated+ Load sensing | ● | | ● | ● | ● | ● | ○ | P0/1 |
| | | Electrically (negative control) +Pressure cut-off+ Load sensing | ● | | | | ● | ● | ○ | L1/1-E0 |
| | | Hydraulic control + Pressure cut-off + Load sensing | | | | | ● | ● | ○ | L1/1-H0 |
| | | +Load sensing | | ● | | | | | | LP1 |

Connector for solenoids

| Connector for solenoid | | S28 | 28 | 45 | 60 | 76 | 85 | 105 | Code |
|------------------------|---|-----|----|----|----|----|----|-----|-------|
| ⑬ | Without solenoid | ● | ● | ● | ● | ● | ● | ● | Blank |
| | AMP Junior timer; 2 contact pin, (without suppressor diode) | | | | | ● | ● | ○ | A |
| | Deutsch DT04-2P; 2 contact pin, (without suppressor diode) | ● | ● | ● | ● | ● | ● | ● | D |

Input Voltage

| | | |
|---|------------------|-------|
| ⑭ | Without solenoid | Blank |
| | 12VDC | 1 |
| | 24VDC | 2 |

Application Conditions

| Application | | S28 | 28 | 45 | 60 | 76 | 85 | 105 | Code |
|-------------|--|-----|----|----|----|----|----|-----|-------|
| ⑮ | Apply to excavator | ● | ● | ● | ● | ● | ● | ● | T |
| | Other mobile machinery, construction machinery, industrial application | ● | ● | ● | ● | ● | ● | ● | Blank |

Remark: ● = available; ○ = On request;

Regulators introduction

Code: L1(DR)

Control Type :

1. Load sensing


Standard setting: 15bar

Adjustment range: 10bar-21bar

2. Pressure Cut-off

Standard setting: 320bar

Adjustment range: 21bar-320bar



Function and Features: Load sensing + Pressure Cut-off

The load sensing control is a flow control option that operates as a function of the load pressure to regulate the pump displacement to match the actuator flow requirement.

The load sensing control compares pressure before and after the sensing orifice and maintains the pressure drop across the orifice (differential pressure Δp) and with it the pump flow constant.

If the differential pressure Δp increases, then the pump displacement decreases, and if the differential pressure Δp decreases, then the pump displacement increases until the pressure drop across the sensing orifice in the valve is restored.


$$\Delta p = P_p - P_L$$

Pump displacement is controlled to match the flow requirement as a function of the system differential pressure (load pressure vs delivery pressure). In addition, there is a pressure cut off function incorporated into the control.

The pressure cut off control keeps the pressure in a hydraulic system constant within its control range even under varying flow conditions, the variable pump only moves as much hydraulic fluid as is required by the actuators. If the operating pressure exceeds the set point set at the pressure control valve, the pump displacement is automatically swivelled back until the pressure deviation is corrected.

"DR" control is on the basis of "L1" control, tighten the load sensitive valve adjust screw, and the load sensitive valve doesn't work.

Hydraulic Circuit:

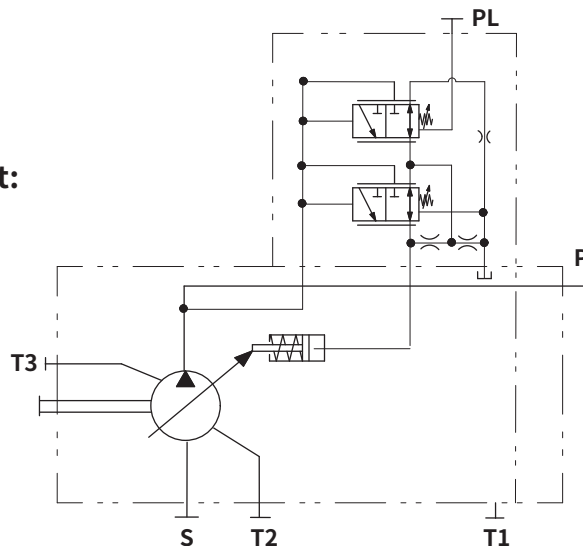


Regulators introduction

Code: P0

Control Type :

- 1. Load sensing**
Standard setting:15bar
Adjustment range:10bar-21bar
- 2. Pressure Cut-off**
Standard setting:320bar
Adjustment range:21bar-320bar




Function and Features: P0 Pressure cut-off

The Pressure Cut-off regulator monitors outlet pressure once the pressure reaches the cut-off setting, the pump will return to minimum displacement.

Remote Control

The pump can be remotely controlled by connecting a relief valve to the PL port of the regulator. The pump can also be unload at a low pressure continue standby condition by using a solenoid valve.

Hydraulic Circuit:

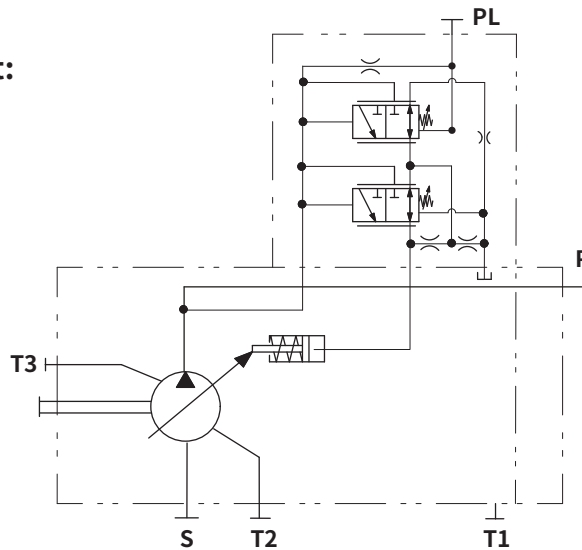


HP5V

Regulators introduction

Code: □ /1

Control Type :

- 1. Load sensing**
Standard setting: 15bar
Adjustment range: 10bar-21bar
- 2. Pressure Cut-off**
Standard setting: 320 bar
Adjustment range: 21 bar-320 bar
- 3. Torque limiting**

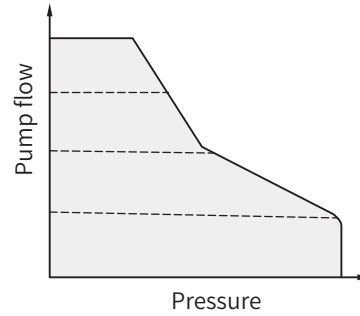


Function and Features: □/1 Load Sense and Pressure Cut-off with Torque limiting

The L1 control functions as previously noted. In response to a rise in delivery pressure the swash plate angle is decreased, restricting the input torque. This regulator prevents excessive load against the prime mover.

The torque limit control module is comprised of two springs that oppose the spool force by the system pressure. By turning an outer and inner spring adjustment screw, the appropriate input torque limit can be set.

Hydraulic Circuit:

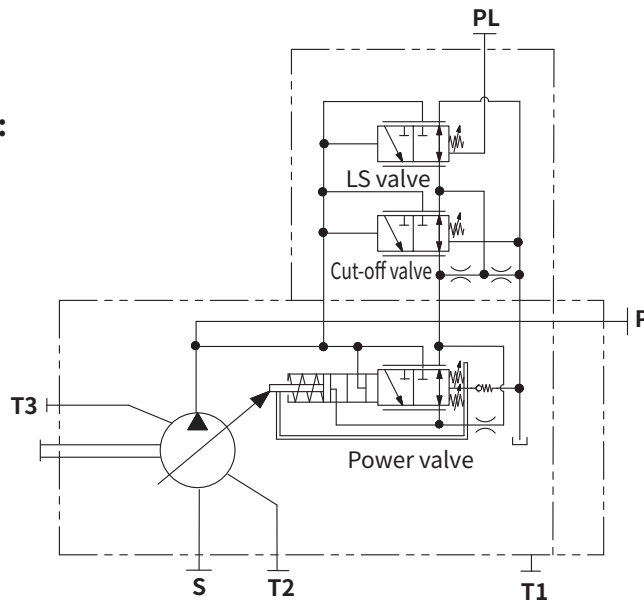

Regulators introduction

Code: /1-E0

Control Type :

- 1. Load sensing**
Standard setting:15bar
Adjustment range:10bar-21bar
- 2. Pressure Cut-off**
Standard setting: 320bar
Adjustment range: 21bar-320bar
- 3. Port Pr pressure: 20bar~45bar**
- 4. Electromagnet characters**



| Voltage(V) | Current(A) | Resistance(Ω) | Insulation grade |
|------------|------------|------------------------|-------------------|
| 12 | 0.80 | 7.3 \pm 10%(20°C) | H(180°C) |
| 24 | 0.75 | 21.2 \pm 10% | UP to IP6K6/IPX9K |


- 5. Connector (deutsch or Amp)**
DEUTSCH: DT04-2P-E005
AMP: 174354-2, 173706-1

Function and Features:

/1-E0 Load Sense and Pressure Cut-off with Torque limiting

The L1 control functions as previously noted. It controls the input torque of the pump by changing different current, specific current is related to certain input torque, thus satisfy needs of different torque on excavator

Hydraulic Circuit:

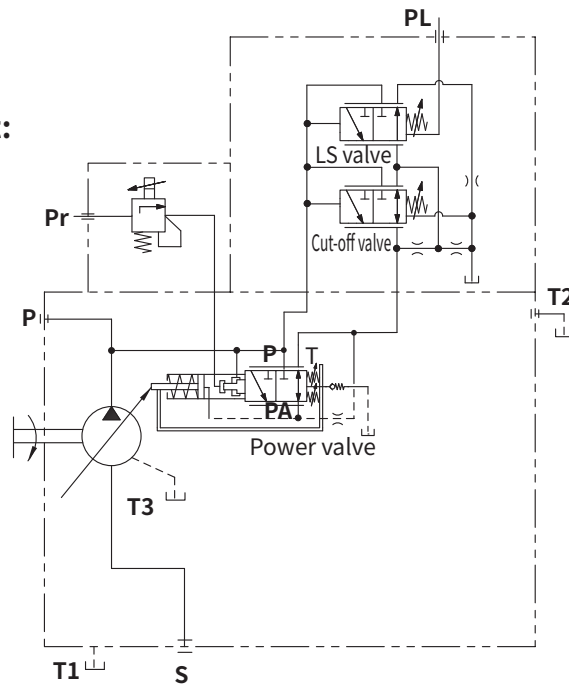


HP5V

Regulators introduction

Code: □ /1-H0

Control Type :


- 1. Load sensing**
Standard setting:15bar
Adjustment range:10bar-21bar
- 2. Pressure Cut-off**
Standard setting: 320bar
Adjustment range: 21bar-320bar
- 3. Port Pr pressure: 0bar~39bar**

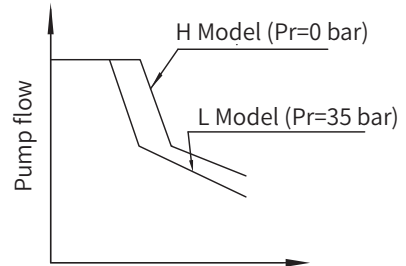

Function and Features:

_/1-H0 Load Sense and Pressure Cut-off with Total torque limiting
The L1 control functions as previously noted. It controls the input torque of the pump by changing different input pressure of port Pr, specific current is related to certain input torque, thus satisfy needs of different torque on excavator.

Hydraulic Circuit:

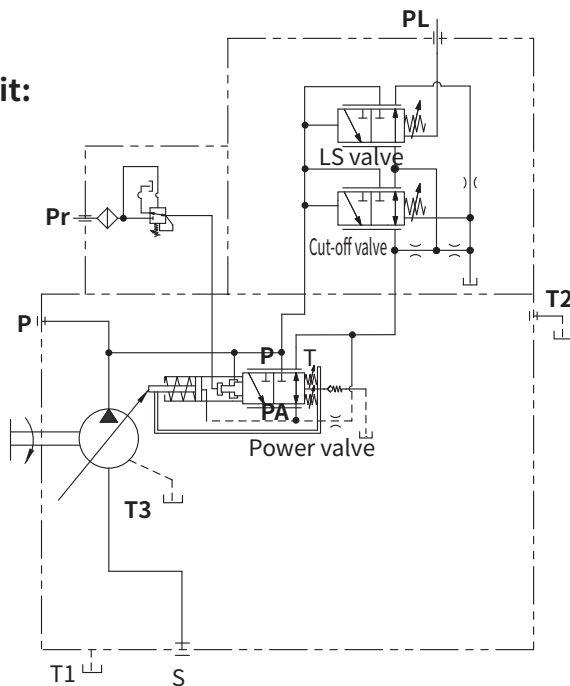


Regulators introduction

Code: LP1

Control Type:

1. Load sensing
Standard setting: 17bar
Adjustment range:13bar~17bar
2. Torque limiting

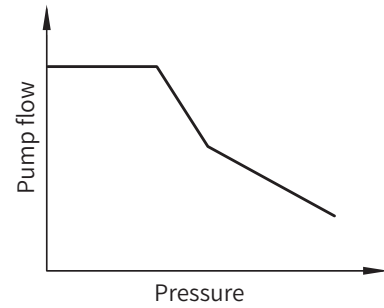


Function and Features: 1 Load Sense and Pressure Cut-off with Torque limiting

The L1 control functions as previously noted. In response to a rise in delivery pressure the swash plate angle is decreased, restricting the input torque. This regulator prevents excessive load against the prime mover.

The torque limit control module is comprised of two springs that oppose the spool force by the system pressure. By turning an outer and inner spring adjustment screw, the appropriate input torque limit can be set.

Hydraulic Circuit:

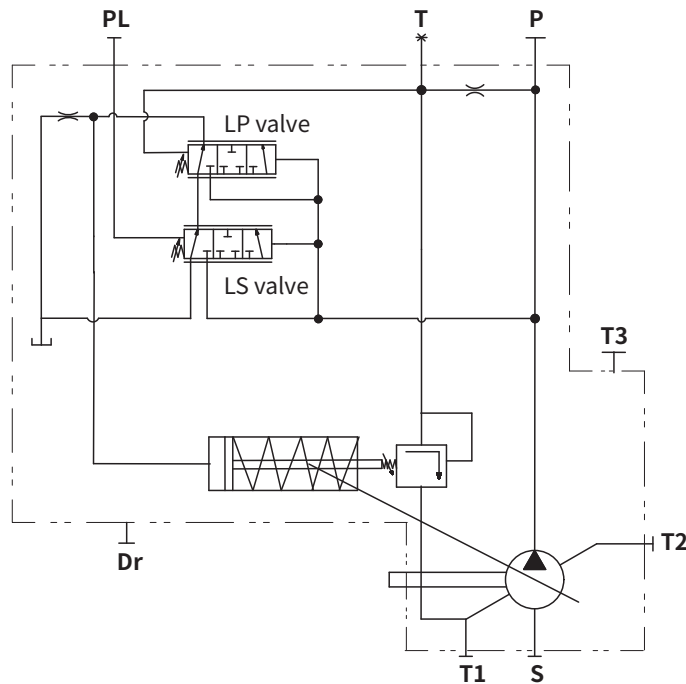

Regulators introduction

Code: ER2

Control Type : Electro-hydraulic pressure control


The ER2 valve is set to a certain pressure by a specified variable solenoid current.

This causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level. The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current.

As the solenoid current signal drops towards zero, the pressure will be limited to Pmax by an adjustable hydraulic pressure cut-off to secure fail safe function


Static current-pressure characteristic curve ER2

(negative characteristic curve measured with pump in zero stroke)

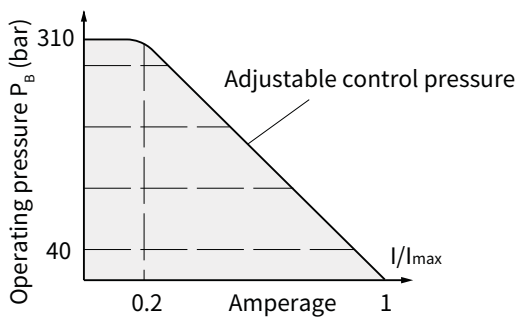


- Hysteresis static < 3 bar

Circuit diagram:

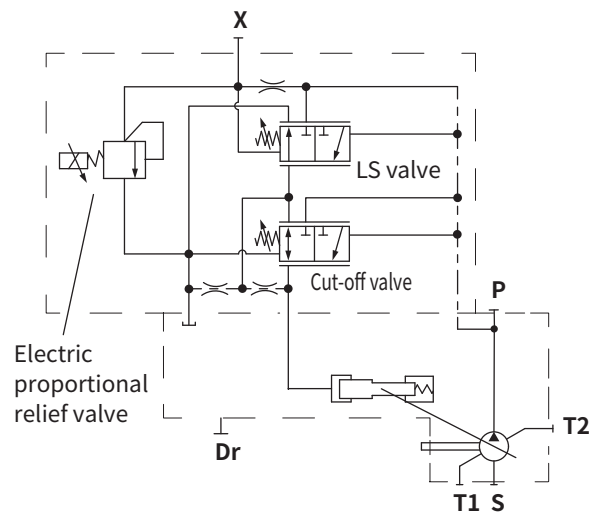

Flow-pressure characteristic curve

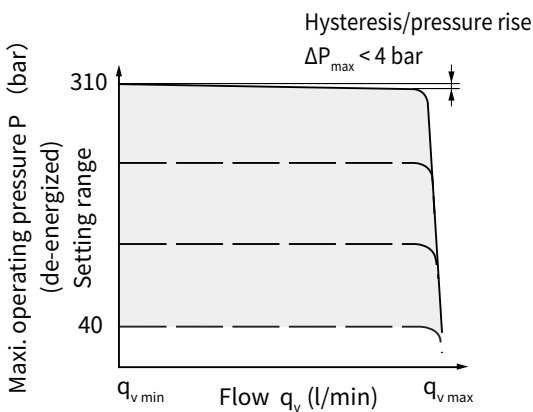


- Characteristic curves valid for $n_1 = 1500 \text{ rpm}$ and $t_{\text{fluid}} = 50 \text{ }^\circ\text{C}$.

| Technical data, solenoid | | |
|--------------------------------------|--|---------------------|
| Voltage | | 24 V ($\pm 20\%$) |
| Control current | Start of control at p_{max} . | 50 mA |
| | End of control at p_{min} . | 600 mA |
| Limiting current | | 0.77 A |
| Nominal resistance (at 20°C) | | 22.7Ω |
| Dither frequency | | 100 ~ 200 Hz |
| Actuated time | | 100% |
| Operating temperature range at valve | | -20°C to +115°C |

Installation size

HP5VS28 installation size

Displacement is adjustable
 HP5VS28 with Cut-off/Load Sense Control with torque limit
 (Clockwise Rotation)
 For the CCW pump just reverse the inlet and outlet port.

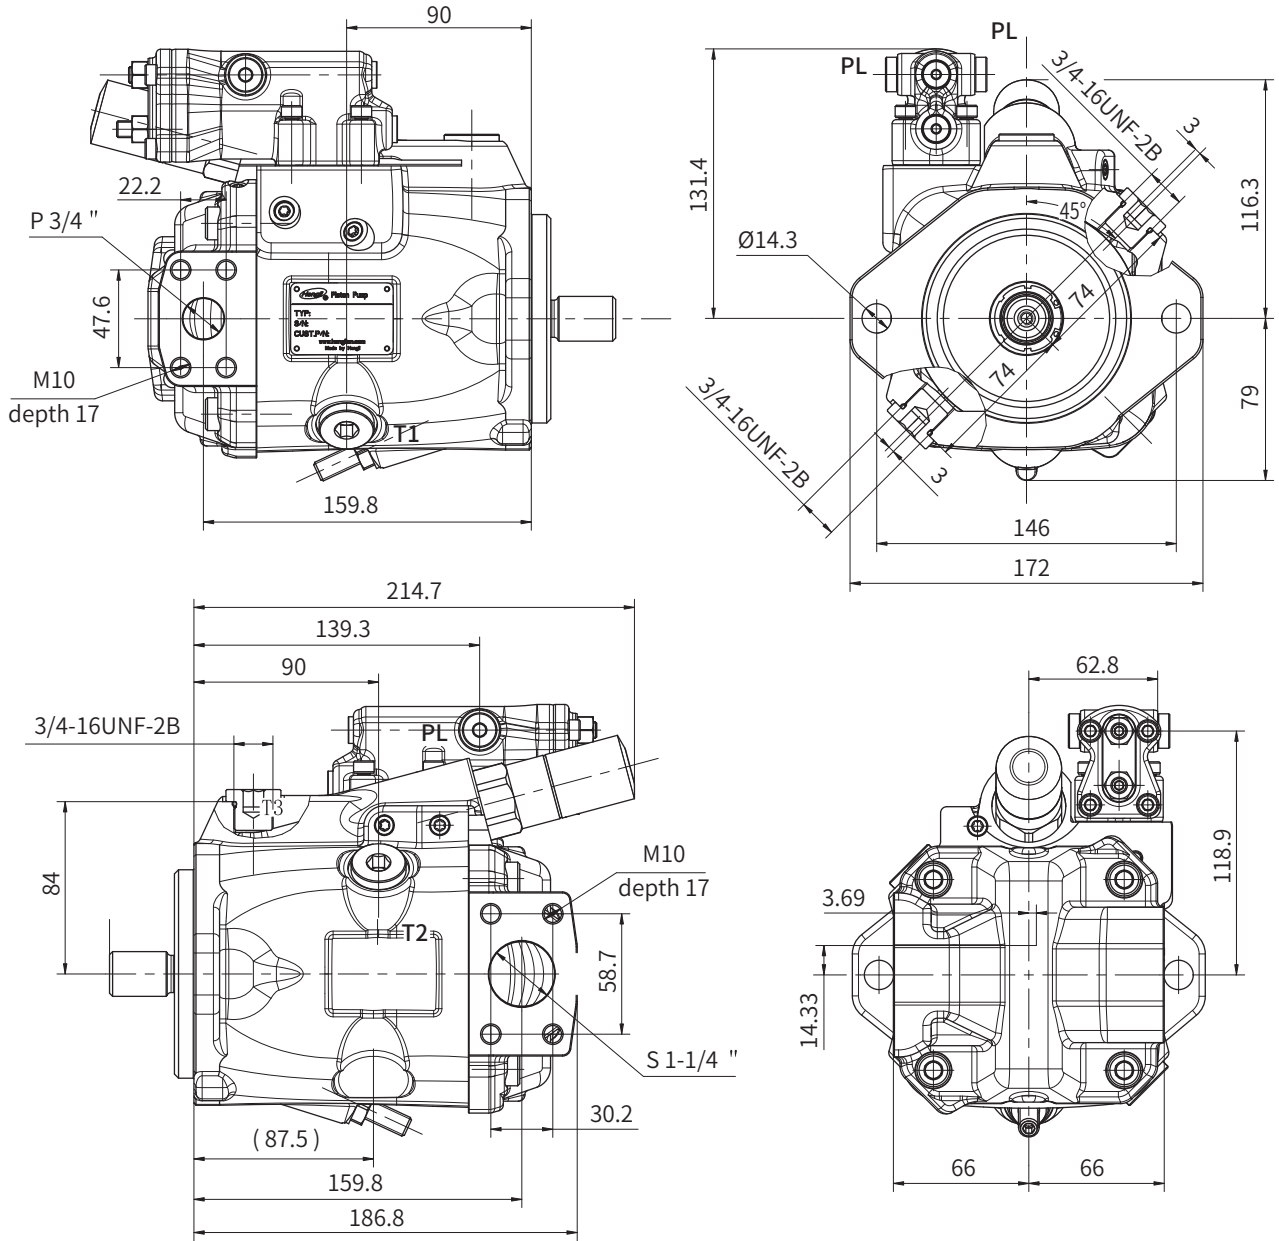


Port Details

| Port Name | | Port Size and Description | | | Tightening Torque (N-m) |
|-----------|-----------------|-----------------------------------|-----------|----------------------------|-------------------------|
| P | Working port | 3/4"SAE J518C code 61 (5000psi) | M(metric) | M10×1.5 (depth 17mm) | 57 |
| | | | S(UNC) | 3/8-16UNC-2B (depth 17mm) | |
| S | Suction port | 1-1/4"SAE J518C code 61 (3000psi) | M(metric) | M10×1.5 (depth 17mm) | 57 |
| | | | S(UNC) | 7/16-16UNC-2B (depth 17mm) | |
| T1、T2、T3 | Case drain port | ISO 11926 (3/4"-16UNF-2B) | | | 98 |
| PL | LS Control port | ISO 11926 (7/16"-20UNF-2B) | | | 12 |

Installation size


HP5V

HP5VS28 Mounting Flange

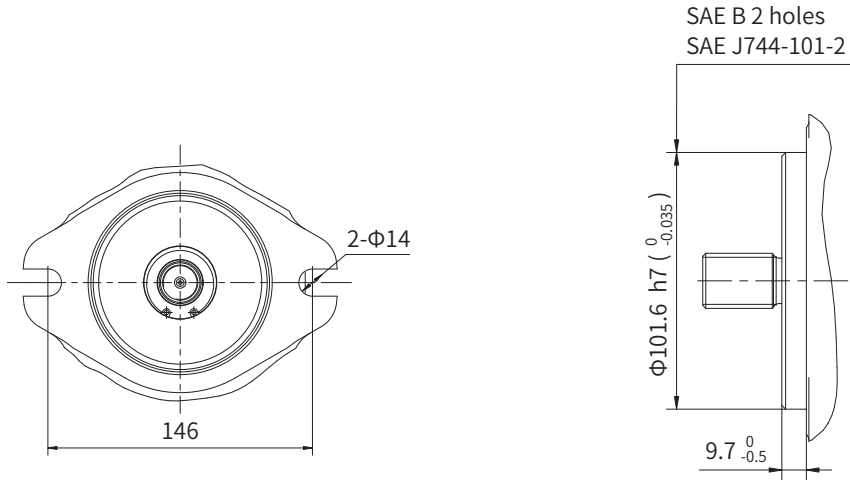


SAE "B2" type

HP5VS28 Input Shaft type

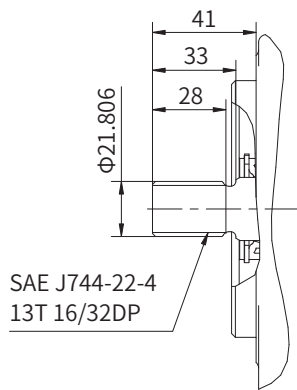

"S1" type spline shaft


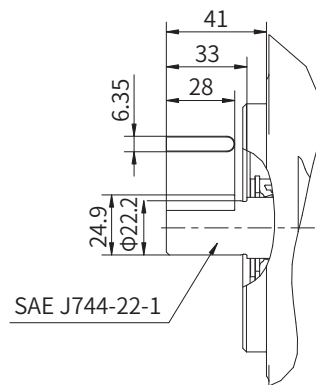


"K1" type straight shaft

Installation size

HP5V28 installation size

Displacement is adjustable
 HP5V28 with Cut-off/Load Sense Control with torque limit
 (Clockwise Rotation)
 For the CCW pump just reverse the inlet and outlet port.

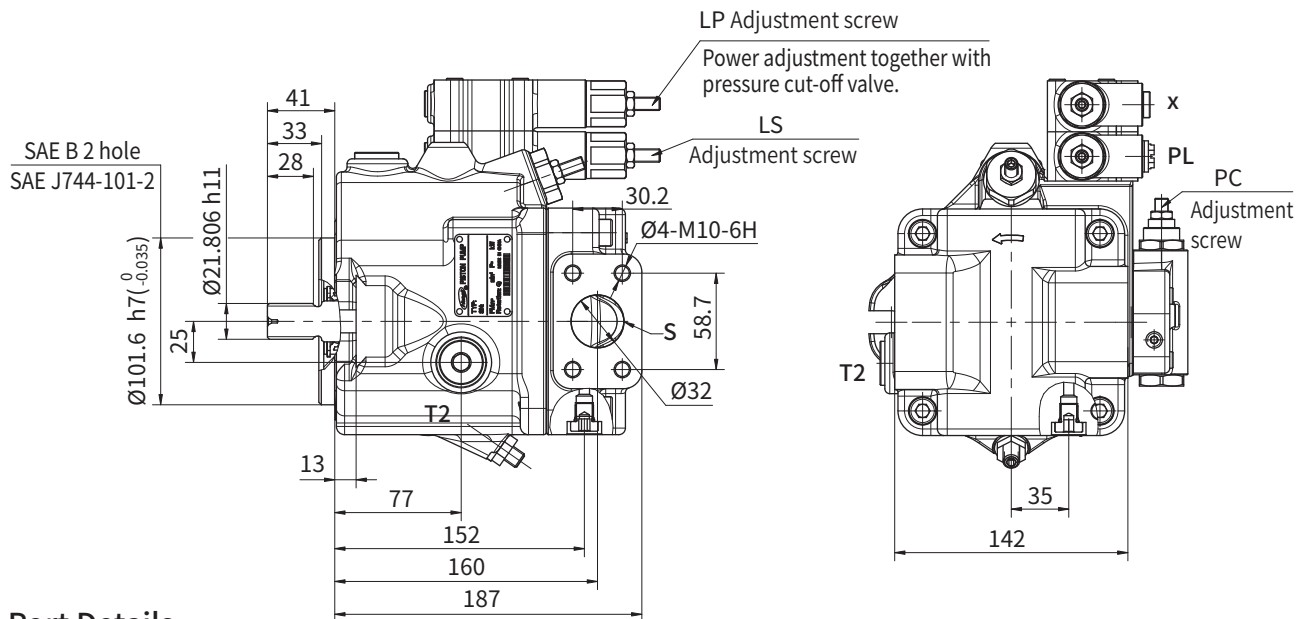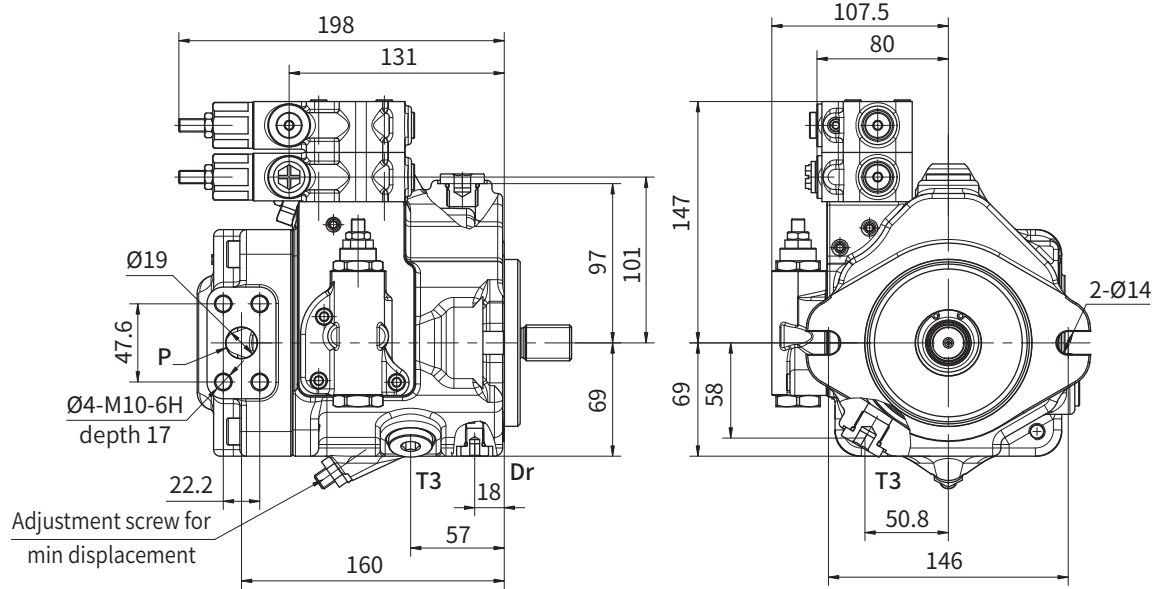


Port Details

| Port Name | | Port Size and Description | | | Tightening Torque (N-m) |
|-----------|-----------------|---|-----------|----------------------------|-------------------------|
| P | Working port | 3/4"SAE J518C code 61 (5000psi) | M(metric) | M10×1.5 (depth 17mm) | 57 |
| | | | S(UNC) | 3/8-16UNC-2B (depth 17mm) | |
| S | Suction port | 1-1/4"SAE J518C code 61 (3000psi) | M(metric) | M10×1.5 (depth 17mm) | 57 |
| | | | S(UNC) | 7/16-16UNC-2B (depth 17mm) | |
| T1、T2、T3 | Case drain port | SAE J1926/1 (3/4-16UNF-2B) depth 16mm | | | 98 |
| PL | LS Control port | G 1/4, depth 12mm | | | 12 |
| Dr | Air bleed port | SAE J1926/1 (7/16-20UNF-2B) depth11.5mm | | | 12 |

Installation size


HP5V

HP5V28 Mounting Flange

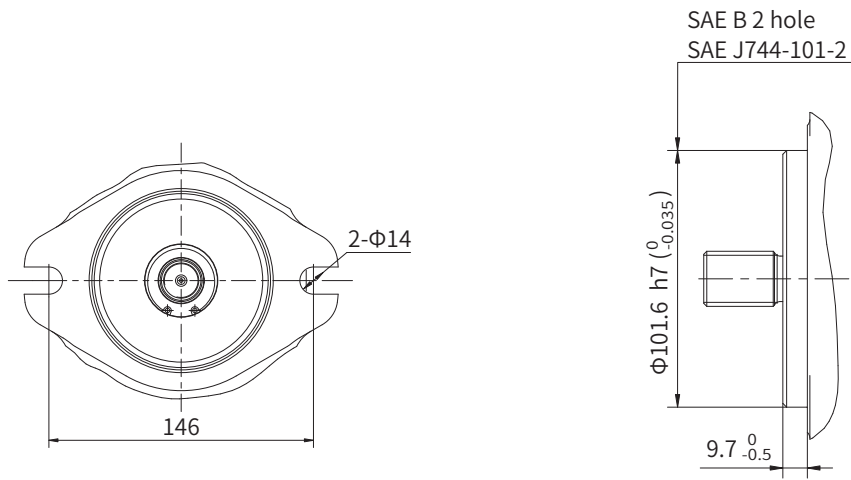


SAE "B2" type

HP5V28 Input Shaft type

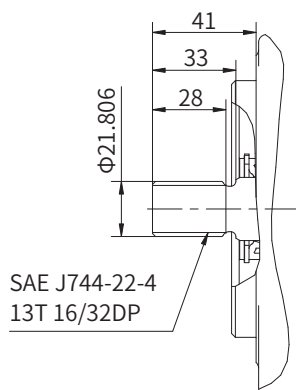

"S1" type spline shaft

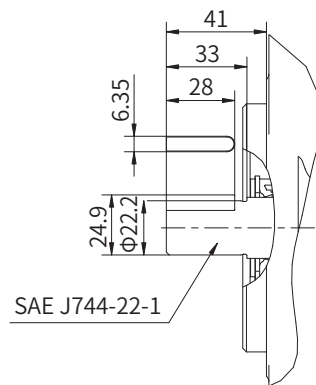


"K1" type straight shaft

Installation size

HP5V45/60 Installation size

HP5V45/60 with Cut-off/Load Sense Control with torque limit
(Clockwise Rotation)

For the CCW pump just reverse the inlet and outlet port.

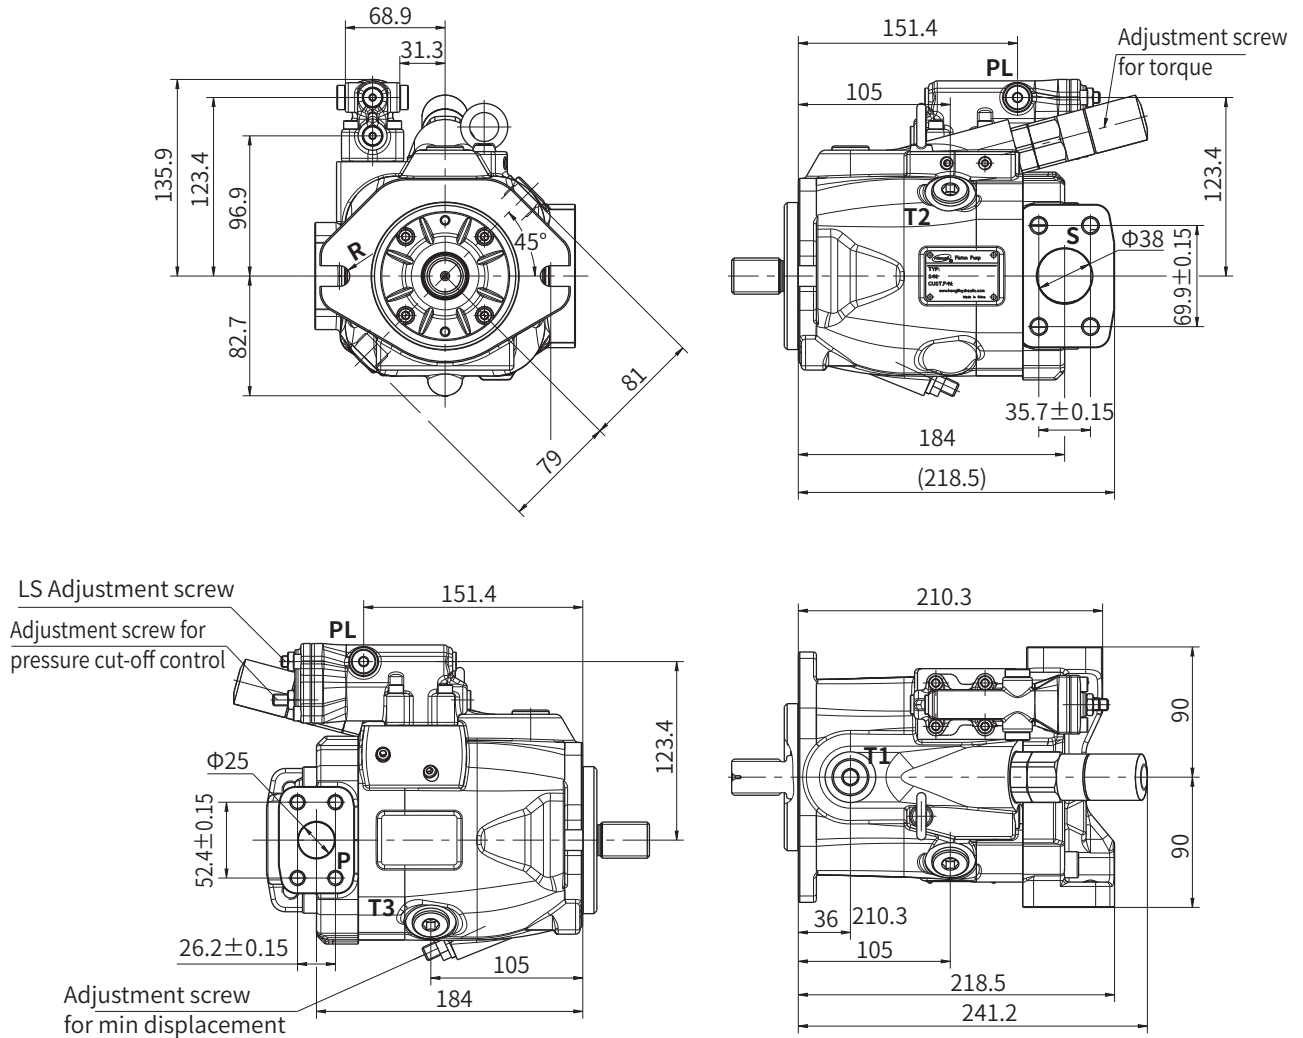


Port Details

| | Port Name | Port Size and Description | | | Tightening Torque (N-m) |
|------------|-----------------|--|------------|---------------------------|-------------------------|
| | | Port Size | Thread | Depth | |
| P | Working port | 1" SAE J518C | M (metric) | M10×1.5 (depth 17mm) | 57 |
| | | Code 61 (5000psi) | S(UNC) | 3/8-16UNC-2B (depth 17mm) | |
| S | Suction Port | 1-1/2" SAE J518C | M (metric) | M12×1.75 (depth 20mm) | 98 |
| | | Code 61 (3000psi) | S(UNC) | 1/2-13UNC-2B (depth 20mm) | |
| T1, T2, T3 | Case drain Port | ISO 11926 (7/8-14UNF-2B) depth 13mm | | | 120 |
| PL | LS Control Port | ISO 11926 (7/16-20UNF-2B) depth 11.5mm | | | 12 |

Installation size


HP5V

HP5V45/60 Mounting Flange

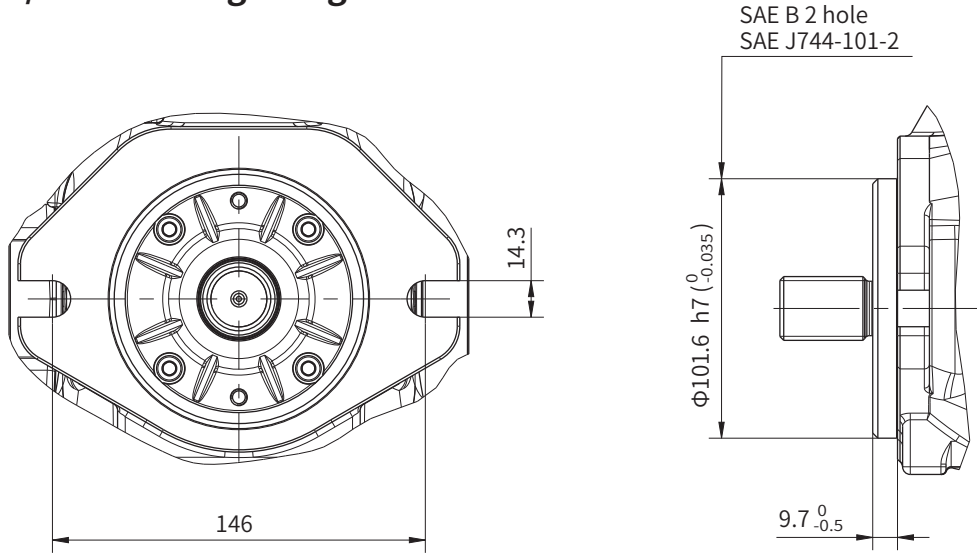

SAE "B2" type

HP5V45/60 Input Shaft type

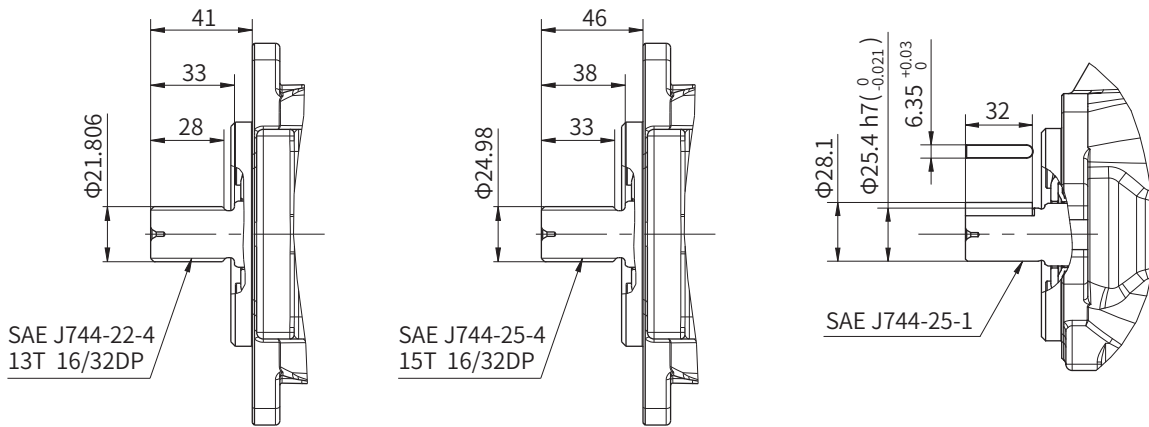

"S1" type spline shaft

"S2" type spline shaft


"K2" type straight shaft

Installation size

HP5V76/85 installation size

HP5V76/85 with Cut-off/Load Sense Control with torque limit
(Clockwise Rotation)

For the CCW pump just reverse the inlet and outlet port.

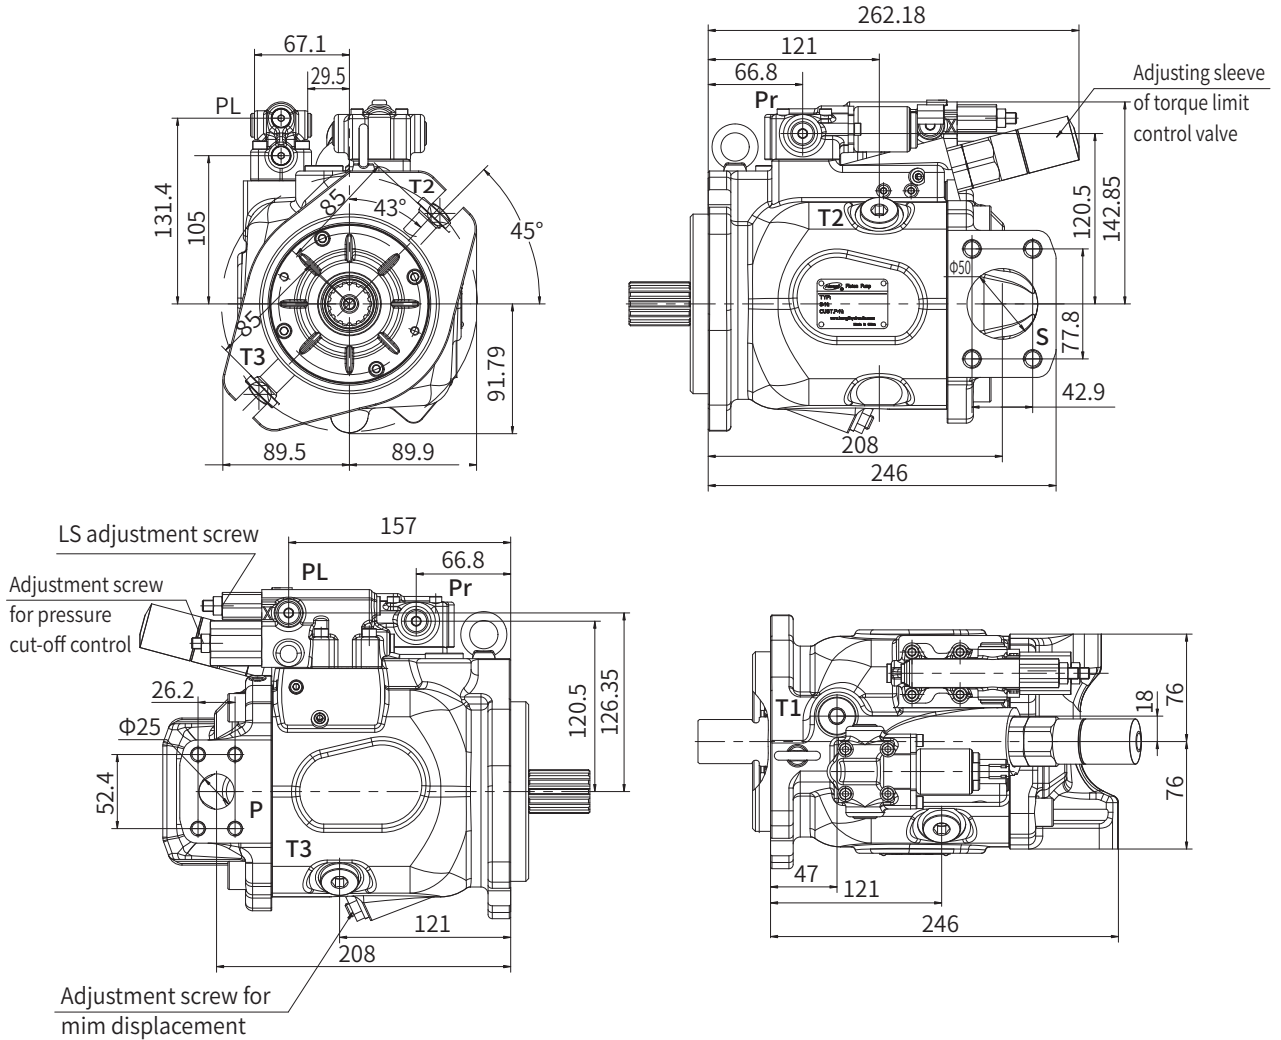



Port Details

| Port Name | Port Size and Description | Tightening Torque (N-m) | |
|------------|---|----------------------------------|-----------|
| | | | Port Name |
| P | Working port 1" SAE J518C Code 61 (5000psi) | M (metric) M10×1.5 (depth 17mm) | 57 |
| | | S(UNC) 3/8-16UNC-2B (depth 17mm) | |
| S | Suction Port 2" SAE J518C Code 61 (3000psi) | M (metric) M12X1.75 (depth 20mm) | 98 |
| | | S(UNC) 1/2-13UNC-2B (depth 20mm) | |
| T1、 T2、 T3 | Case drain Port SAE J1926/1 (3/4-16UNF-2B) (depth 16 mm) | 98 | |
| PL | LS Control Port SAE J1926/1 (7/16-20UNF-2B) (depth 11.5mm) | 12 | |
| Pr | Electronic control or Hydraulic control pilot SAE J1926/1 (7/16-20UNF-2B) depth 11.5mm | 12 | |



Installation size

HP5V

HP5V76/85 Mounting Flange

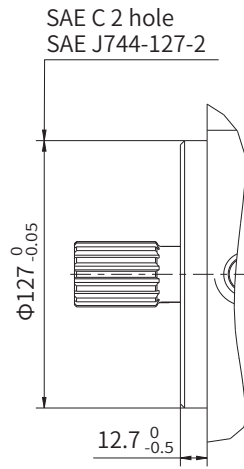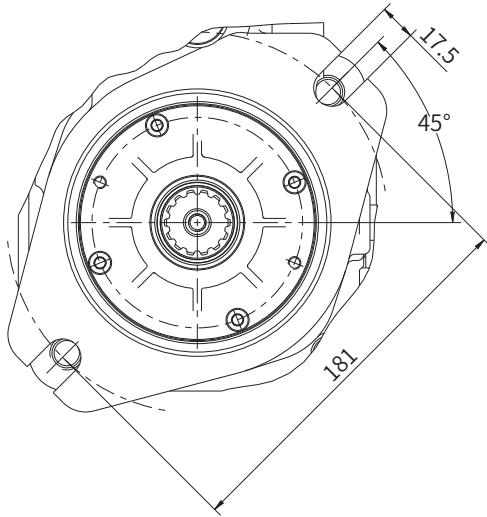


SAE "C2" type

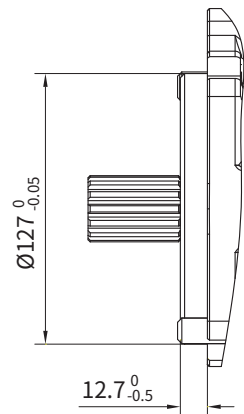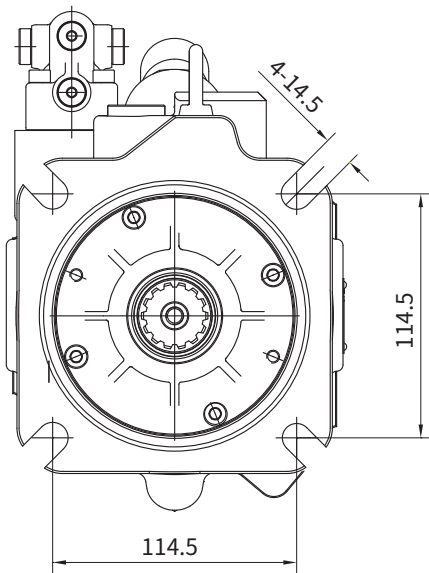


SAE "C4" type

Installation size


HP5V76/85 Input Shaft type

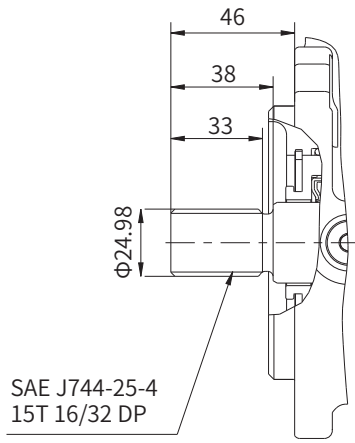

"S2" type spline shaft

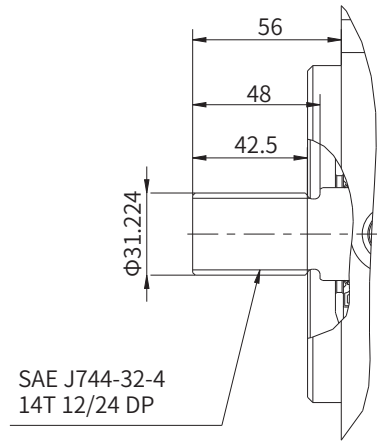

"S3" type spline shaft

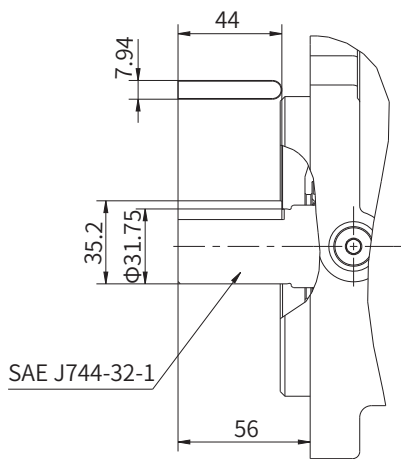

"K3" type straight shaft


Installation size

HP5V

HP5V105 Installation size

HP5V105 with Cut-off/Load Sense Control with torque limit
(Clockwise Rotation)

For the CCW pump just reverse the inlet and outlet port.

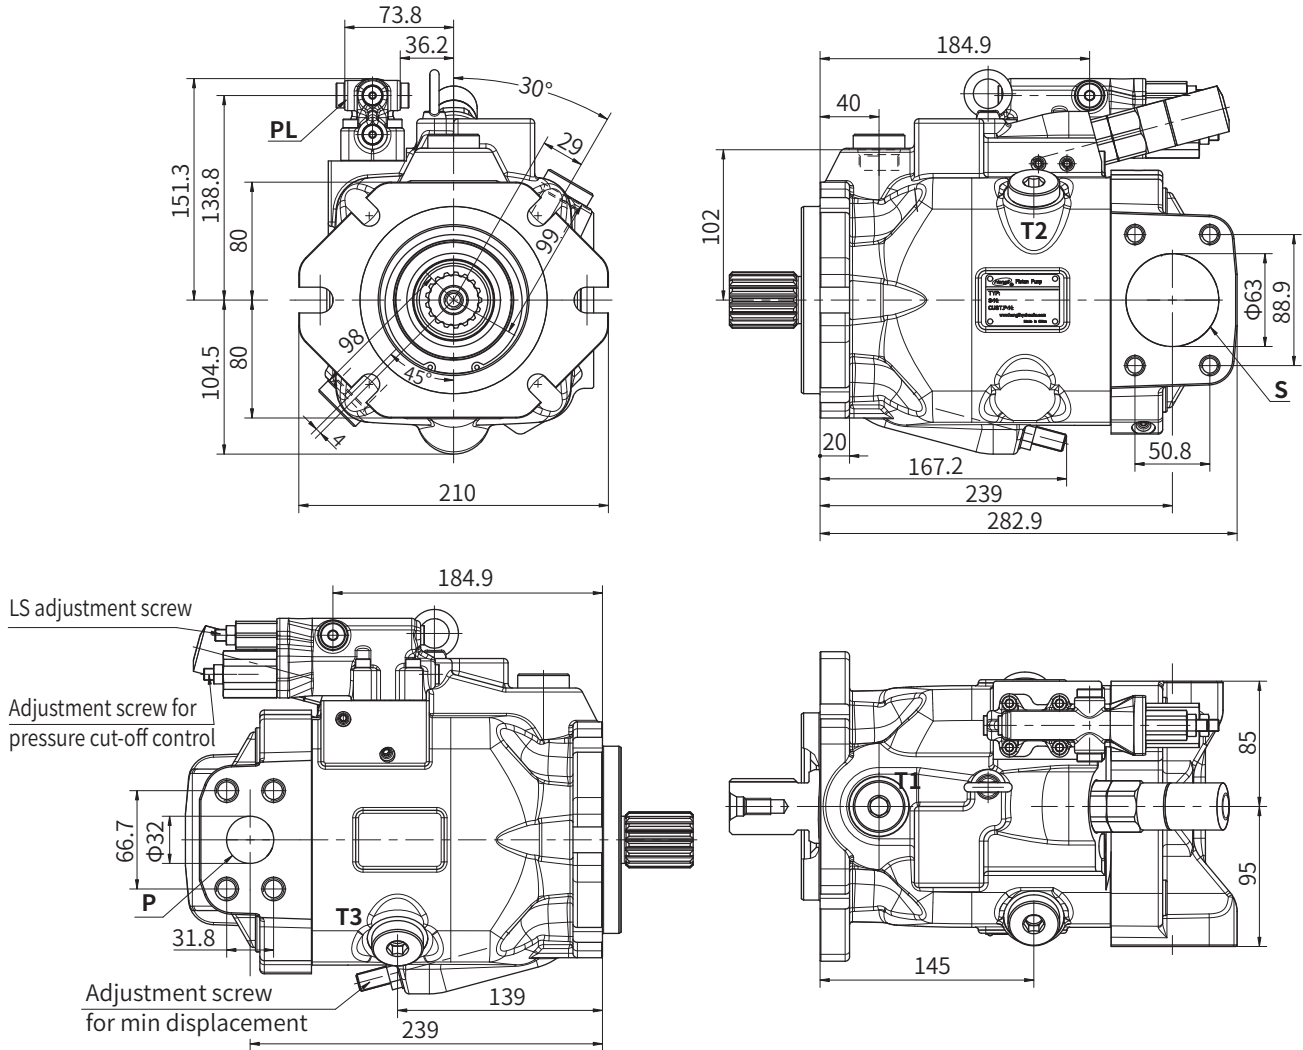


Port Details


| Port Name | Port Size and Description | Tightening Torque (N-m) |
|-----------|------------------------------------|-------------------------|
| | | |
| P | Working port | 157 |
| | 1 1/4" SAE J518C code 62 (5000psi) | |
| S | Suction Port | 98 |
| | 2 1/2" SAE J518C code 61 (2500psi) | |
| T1 | Case drain port | 167 |
| PL | LS Control port | 12 |
| T2, T3 | Ail Bleed port | 167 |

Installation size

HP5V105 Mounting Flange

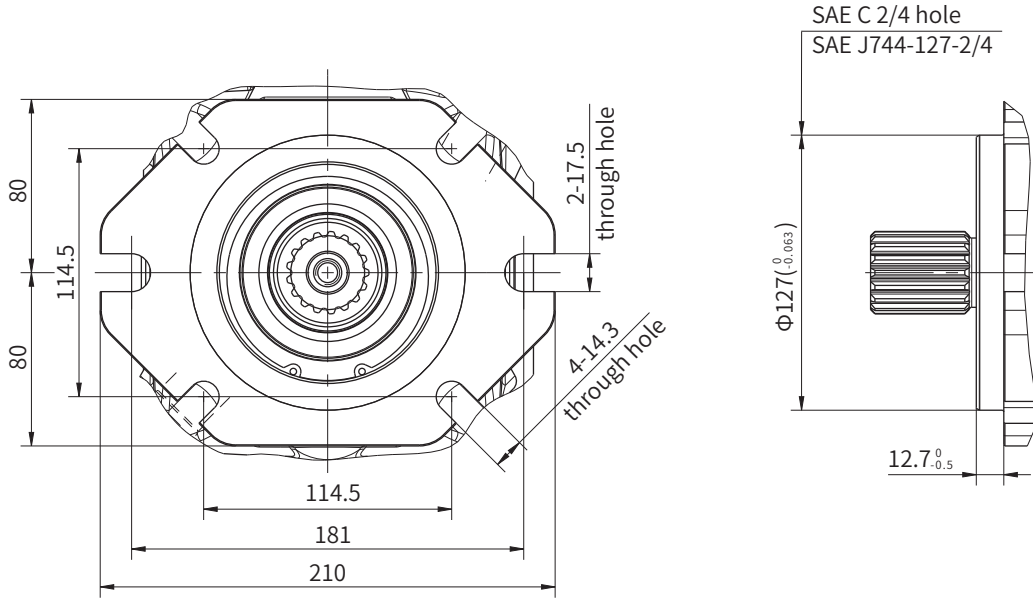

HP5V105 Input Shaft type

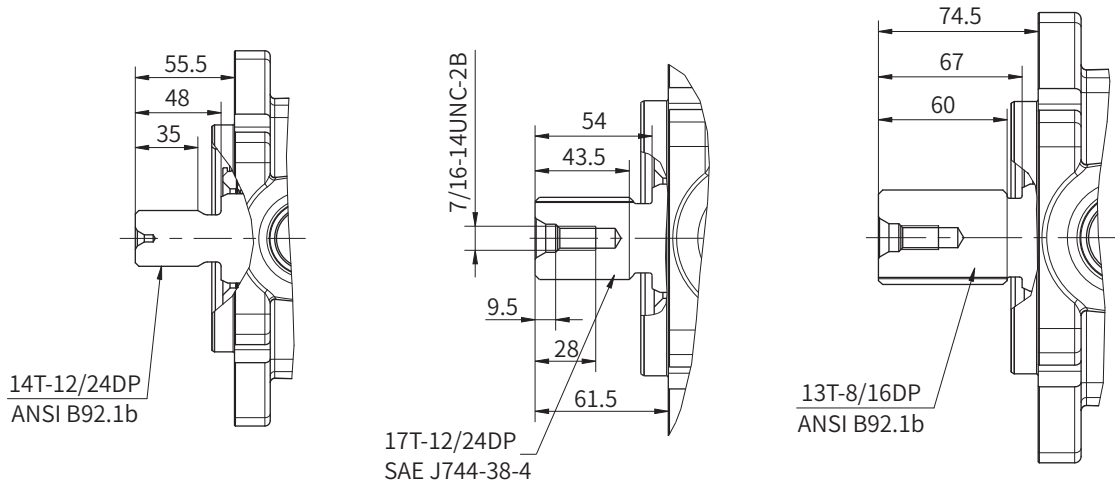

"S3" type spline shaft

"S4" type spline shaft



"S5" type spline shaft

Through Drive Installation Options

HP5V

A1 Type



SAE A 82-2 + SAE J744-16-4 9T 16/32DP

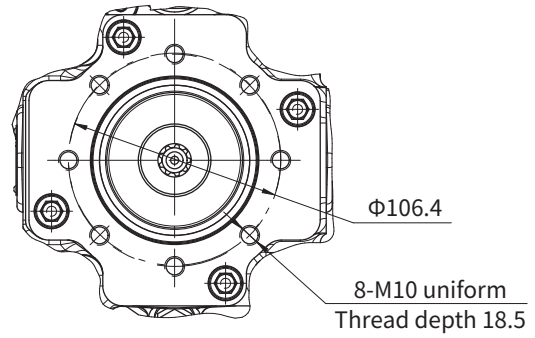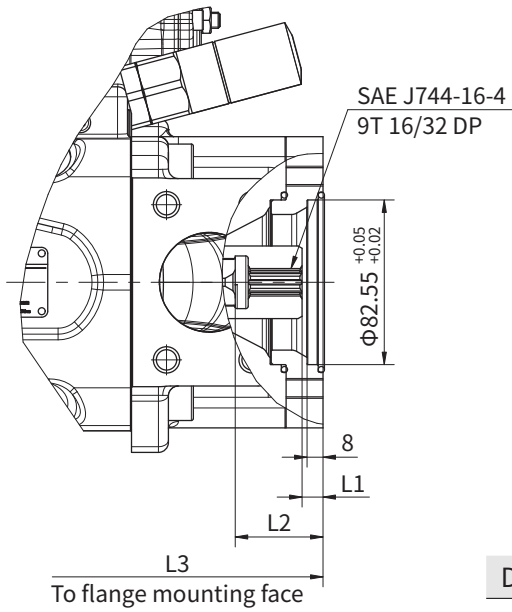

| Disp. (cc/rev) | 28 | 45/60 | 76/85 | 105 |
|----------------|-----|-------|-------|------|
| L1 | 8 | 12 | 10.5 | 14.5 |
| L2 | 34 | 37.5 | 44 | 44.5 |
| L3 | 204 | 226 | 265 | 307 |

A2 Type

SAE A 82-2 + SAE J744-19-4 11T 16/32DP

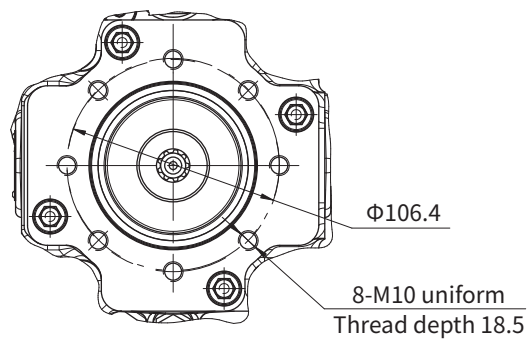
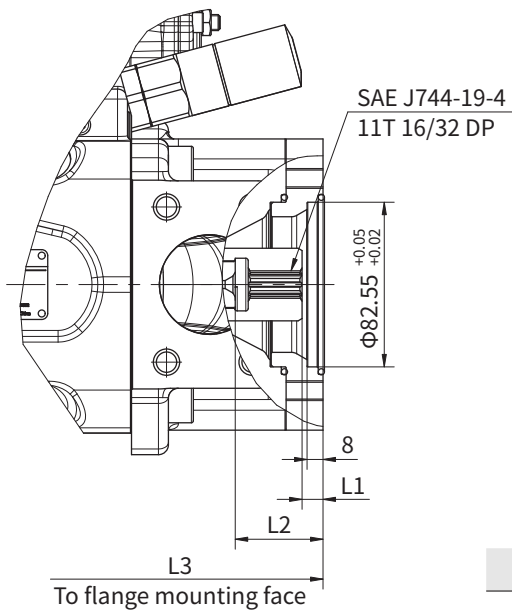


| Disp. (cc/rev) | 76/85 | 105 |
|----------------|-------|------|
| L1 | 10.5 | 14.5 |
| L2 | 44 | 44.5 |
| L3 | 265 | 307 |

Through Drive Installation Options

B1 Type



SAE B 101 -2 + SAE J744-22-4 13T 16/32DP

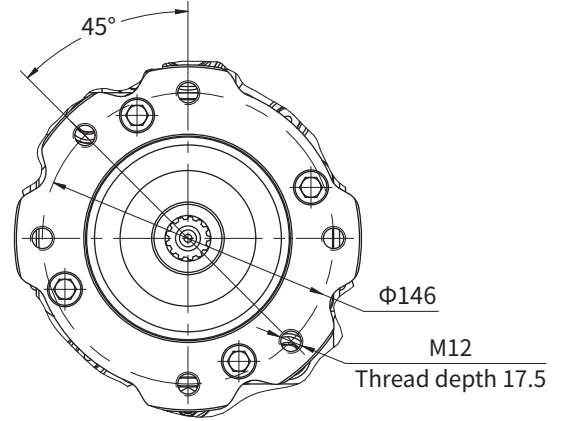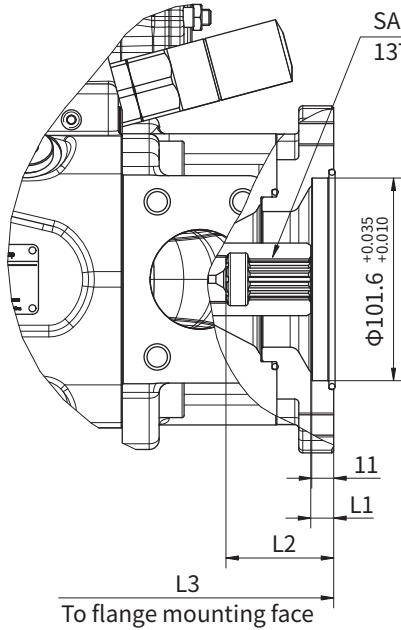

| Disp. (cc/rev) | 28 | 45/60 | 76/85 | 105 |
|----------------|------|-------|-------|------|
| L1 | 11 | 11.2 | 11.5 | 11.5 |
| L2 | 50.5 | 52.4 | 54 | 51 |
| L3 | 224 | 250.5 | 275 | 314 |

B2 Type

SAE B 101 -2 + SAE J744-25-4 15T 16/32DP

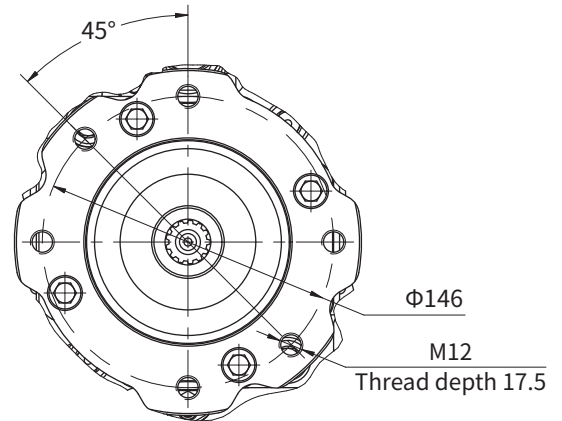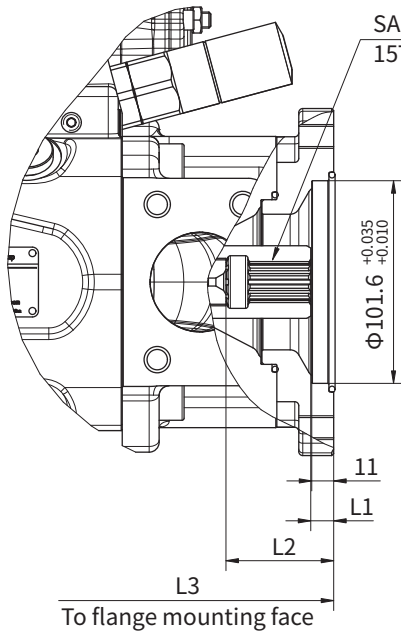


| Disp. (cc/rev) | 45/60 | 76/85 | 105 |
|----------------|-------|-------|------|
| L1 | 11.2 | 11.5 | 11.5 |
| L2 | 52.4 | 54 | 51 |
| L3 | 250.5 | 275 | 314 |

Through Drive Installation Options

HP5V


C1 Type

SAE C 127-2 + SAE J744-32-4 14T 12/24DP

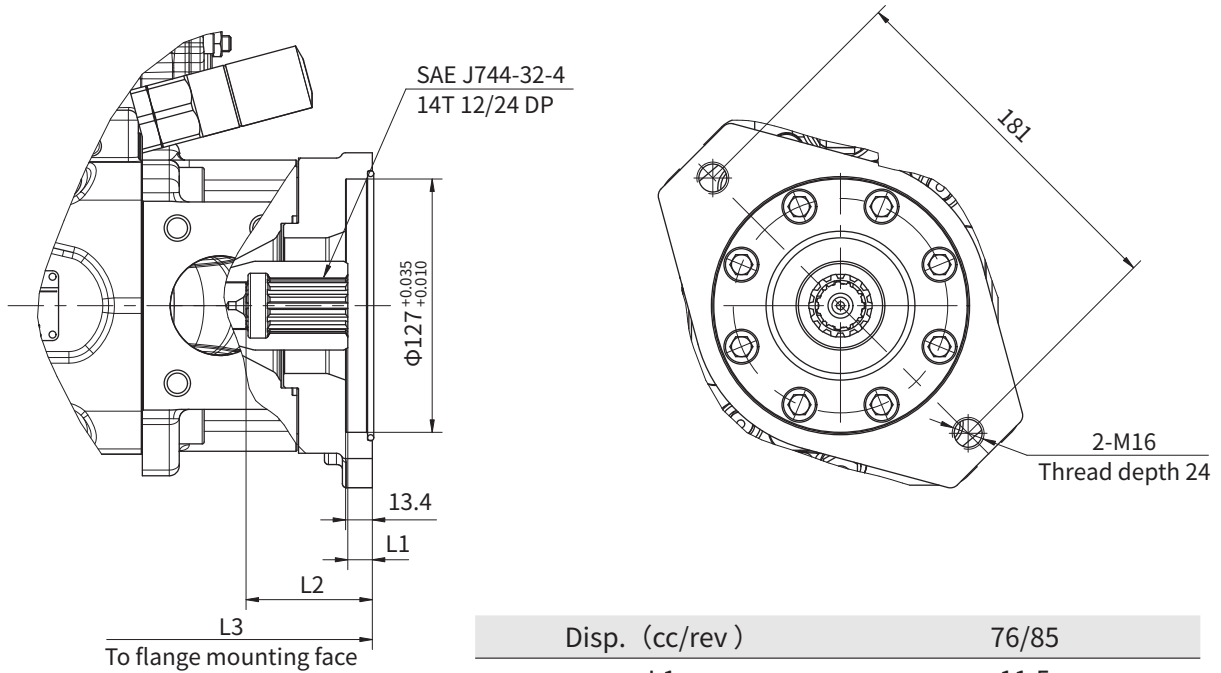

C2 Type



SAE C 127-2 + SAE J744-38-4 17T 12/24DP

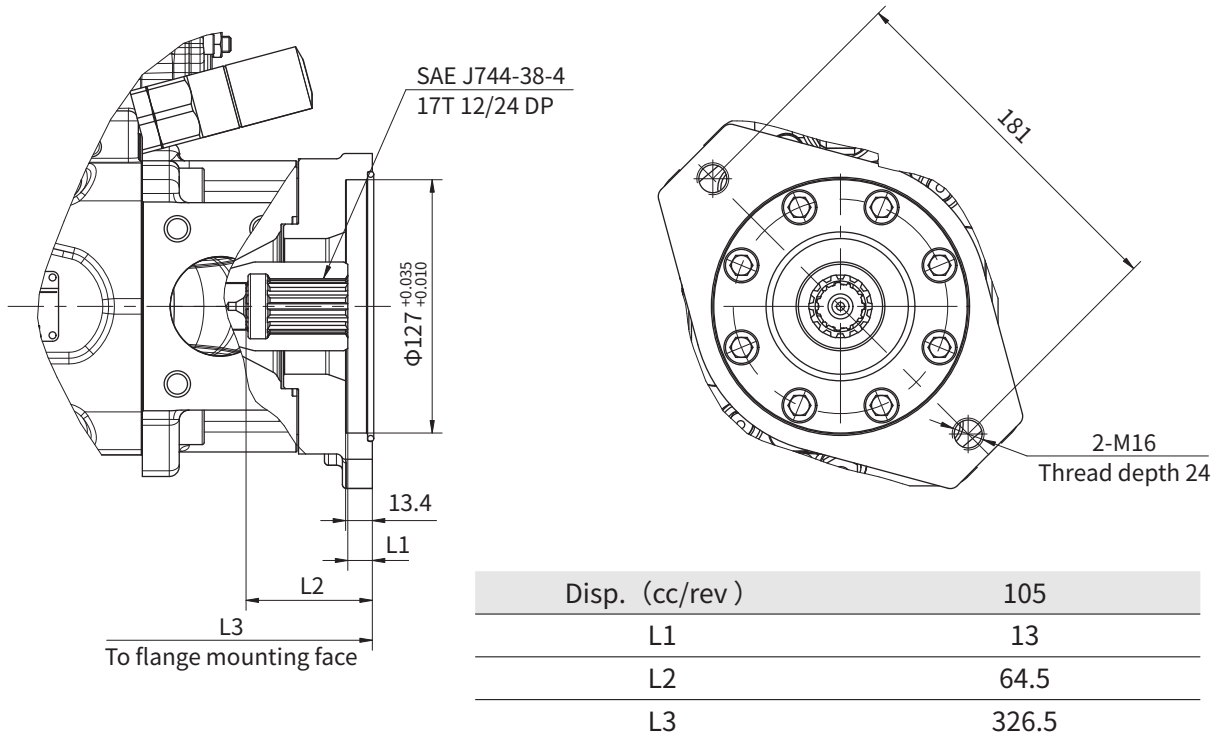

Through Drive Installation Options

C3 Type



SAE C 127-4 + SAE J744-32-4 14T 12/24DP

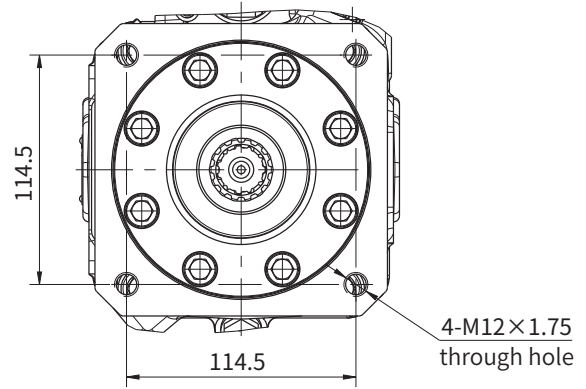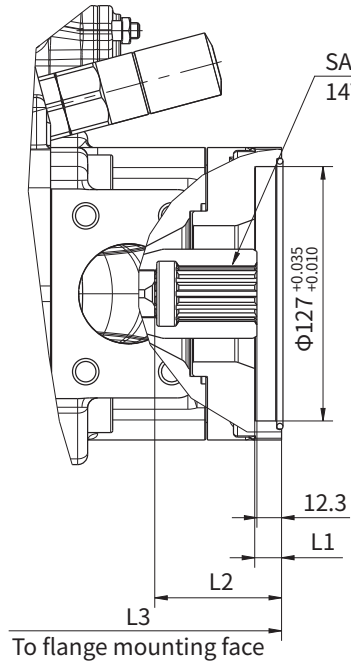

| Disp. (cc/rev) | 76/85 | 105 |
|----------------|-------|-------|
| L1 | 13.4 | 14 |
| L2 | 63.3 | 59 |
| L3 | 284.3 | 321.5 |

C4 Type

SAE C 127-4 + SAE J744-38-4 17T 12/24DP

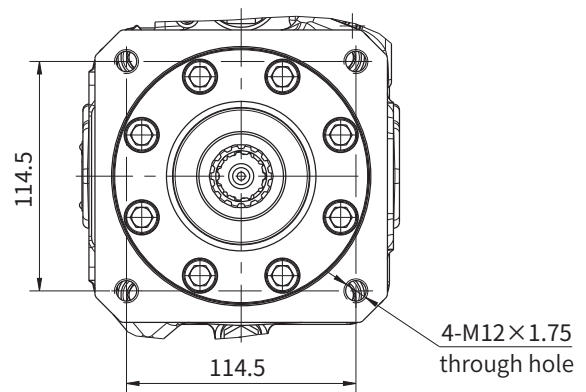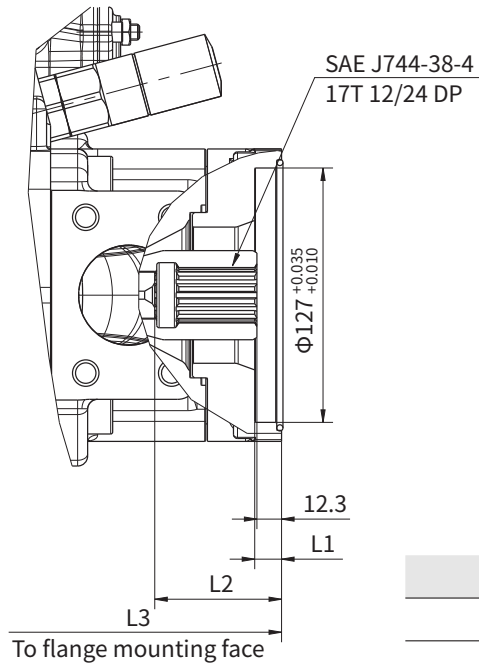

| Disp. (cc/rev) | 105 |
|----------------|-------|
| L1 | 13 |
| L2 | 64.5 |
| L3 | 326.5 |

China

+86 400 101 8889

America

+01 630 995 3674

Germany

+49 (30) 72088-0

Japan

+81 03 6809 1696



© This brochure can be reproduced, edited, reproduced or transmitted electronically without the authorization of Hengli Hydraulic Company. Due to the continuous development of the product, the information in this brochure is not specific to the specific conditions or applicability of the industry, thus, Hengli does not take any responsibility for any incomplete or inaccurate description.